


HYUNDAI

4 CH 4K XVR

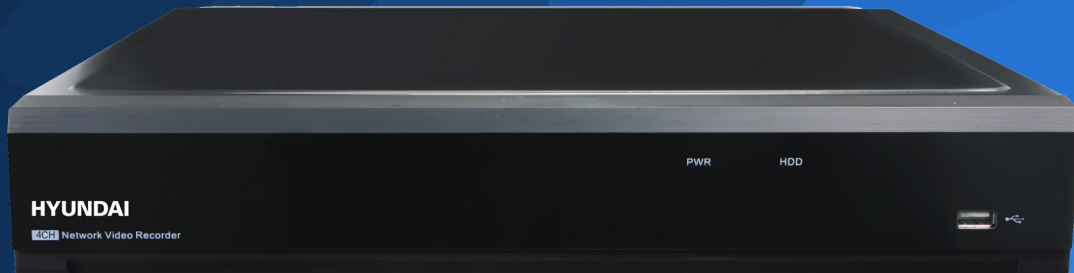

Model: HY-XVR4H6-4K

- 5 IN 1 4ch DVR: Each channel supports AHD/CVI/TVI/Analog/IP Video input
- HDMI / VGA simultaneous output upto 8MP
- H.265/H.264 dual-stream video compression
- Support all channel 8MP (15fps) real viewing and 8MP(6fps) recording
- 4 channel synchronous playback
- Support 4/1 Audio in/out, 4/1 Alarm in / out,
- Support 1 SATA HDD up to 6TB, 2 USB2.0
- Easy-to-use P2P Cloud monitoring: Web Brower, CMS, Mobile APP



HYUNDAI

4 CH 4K XVR

Specification:

Model	HY-XVR4H6-4K	
Video Compression	H.265/H.264	
Video System	NTSC/PAL	
Operation System	Linux(embedded)	
Analog video-input /output	4CH inputs / VGA and HDMI output	
IP Video Input	2ch,(only IP up to 6ch)	
Composite Video Input	up to 6ch (Analog video + IP video)	
Audio input /output	4CH inputs /1CH output(RCA)	
Display	resolution	4K Model: Analog : 8MP (15fps) 5MP (20fps) 4MP/3MP/1080P/720P/960H (30fps) IP : 4MP/3MP1080P/720P 5MP Model: Analog :5MP (20fps) 4MP/3MP(30fps) 1080P/720P/960H IP :4MP/3MP1080P/720P
	feature	1/4/6/S.E.Q.
Record	resolution	Analog :8MP/5MP/4MP/3MP/1080P/720P/960H IP :4MP/3MP1080P/720P
	speed	4K Model: Analog :8MP:6fps(each ch) 5MP:8fps(each ch) 4MP:10fps(each ch) 3MP:12fps(each ch) 1080P:PAL:25fps(each ch)/NTSC:30fps(each ch) IP : PAL:25fps(each ch)/NTSC: 30fps(each ch) 5MP Model: Analog :5MP:12fps(each ch) 4MP:15fps(each ch) 3MP:20fps(each ch) 1080P:PAL:25fps(each ch)/NTSC:30fps(each ch) IP : PAL:25fps(each ch)/NTSC: 30fps(each ch)
IP-Recording Bandwidth (Maximum input Bandwidth)	16Mbps ~48Mbps(default is 16Mbps, decrease one Analog channel can increase 8Mbps)	
Maximum output Brandwidth	48Mbps	
Maximum decode performance	4K Model: 8MP: 12fps (Max 2CH playback) 5MP: 32ps (Max 4CH playback) 4MP: 40fps 3MP: 48fps 1080P: 120fps 5MP Model: (Max 4CH playback) 5MP: 48fps 4MP: 60fps 1080P: 120fps	
Recording Mode	Continuous/Manual/Motion detect	
Synchronous Playback	4CH	
Network Type	Lan, DHCP, and DDNS	
HDD interface	1SATA HDD, up to 8TB	
Multiplex Operation	live display, record, playback, backup and network	
USB	2xUSB(for mouse and backup/upgrade)	
Sensor & Alarm I/O	4 CH inputs /1CH output	
PTZ Control	yes (RS485)	
Mobile Surveillance	Support Mobile Phones based on iPhone and Android operation system	
VGA/HDMI	1024*768,1280*720,1280*1024,1440*900,1920*1080(1080P),2560*1440(2K),3840*2160(4K)	
Power Supply	DC 12V/2A	
Dimension(WxDxH)	300X227X53mm	
Working Temperature	-10°C~+55°C	
Working Humidity	10%~90%	